

HYDRONIC TOWEL WARMER

General


Provide MYSON COS CLASSIC COMFORT hydronic towel warmer including accessories as scheduled. COS Classic Comfort towel warmers, available in 4 sizes, are made of cold rolled steel tube and fittings in a variety of finishes. The COS hydronic towel warmer is approved for installation on closed loop hydronic hot water systems only.

Each COS towel warmer is constructed with 1-1/2" "D" shaped vertical and 1" diameter horizontal bars. An adjustable three point mounting kit in a matching finish is included. The towel warmers are equipped with a blind plug and manual air vent. Every unit is factory filled, tested and inspected to insure the finest quality product.

Standard Connections: 4 x internal thread G 1/2" BSP Weight: (see below) Available Finishes:

Polished Chrome, Satin Nickel


Maximum positive operating pressure: 77 psi Maximum operating temperature: 230° F

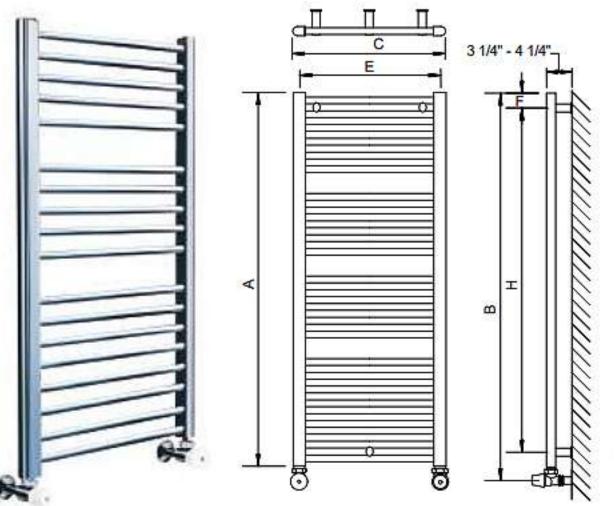

•	· · · \ •
	~
(0.000)	COS Mounting Bracket Detail

NOTE:

Dimensions "F" and "H" may vary depending on the positioning of the mounting brackets.



COS85,86 Configuration



Standard Valve Set - STDVKIT The set includes one (1) FF16WAC adjustable and (1) FF16LAC) non-adjustable ½" valve. Available only with chrome angle body and white handles




Modern Valve Set - V16A
"Angle" or V16S "Straight"
pattern. Straight valves are
normally used when the pipes
come from the floor instead of
the wall. Available in matching
finishes.



Cross Handle Valve Set - CHV16 The set includes two (2) Cross Handle valves . The Cross Handle valves are only available in an angle pattern and are available in matching finishes.



Sieve Kit - SK16 The set includes two (2) .656" I.D. x 3" brass sleeves and two (2) 2" diameter brass escutcheons. Available in matching finishes.

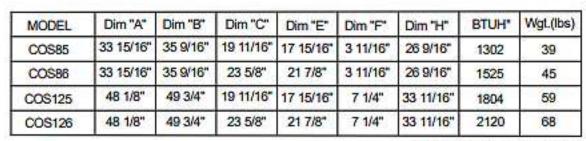

*AWT = 155 Degrees Fahrenheit



Optional valves and sleeve kits are recommended and available from MYSON.